MIPs calibration

Shaun Krueger
UofR Group
Updated: Sept 24, 2013

Peak vs Sum Plot (2404 Upstream)

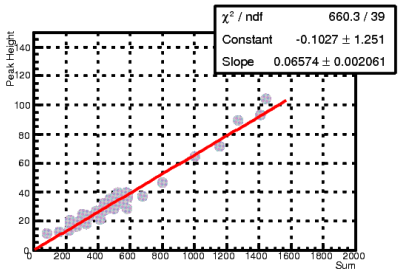

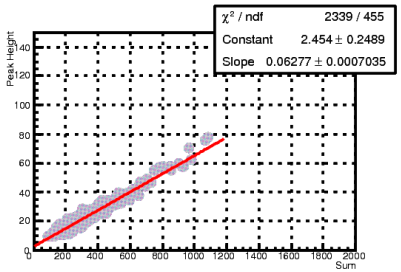

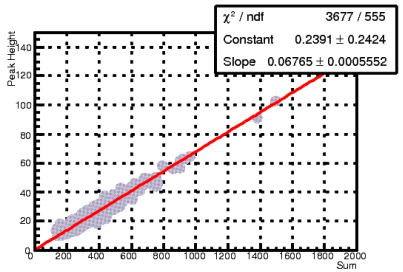

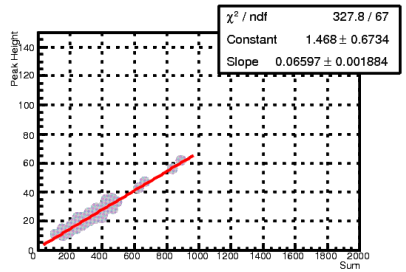

X: 120

Y: 2000

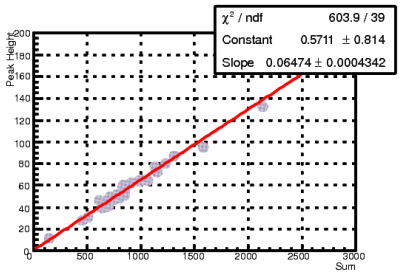

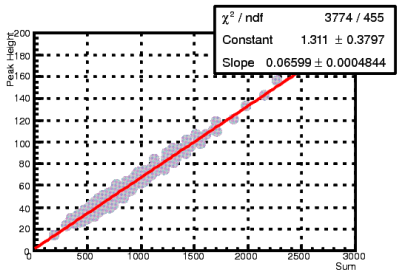

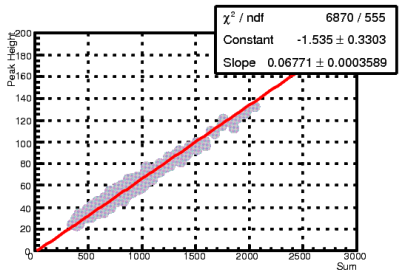

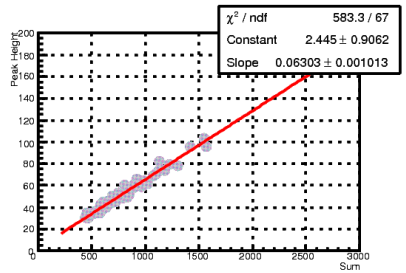

X: 200

Y: 3000

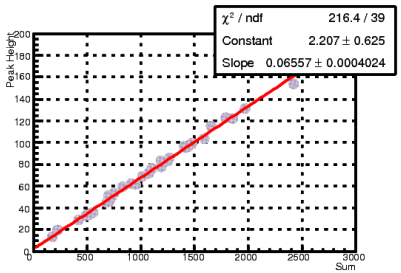

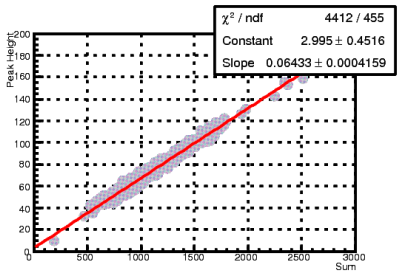

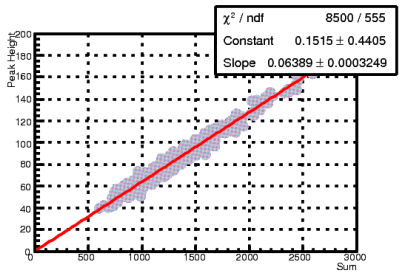

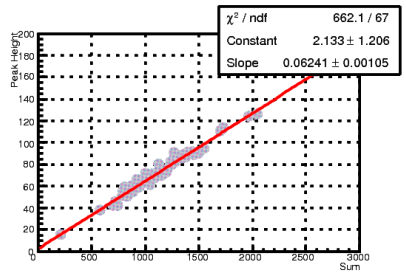

X: 200

Y: 3000

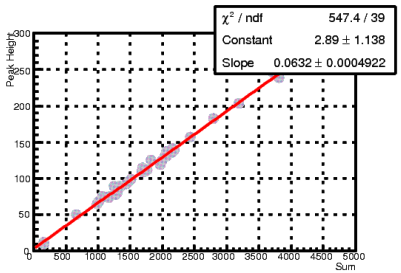

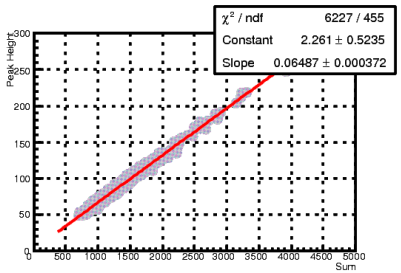

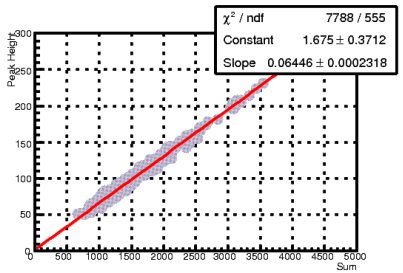

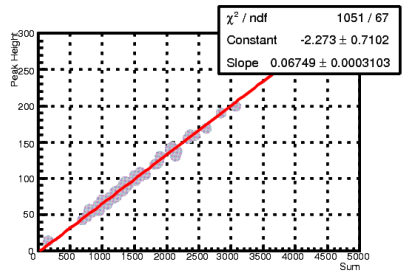

X: 300

Y: 5000

Slope scatter plot

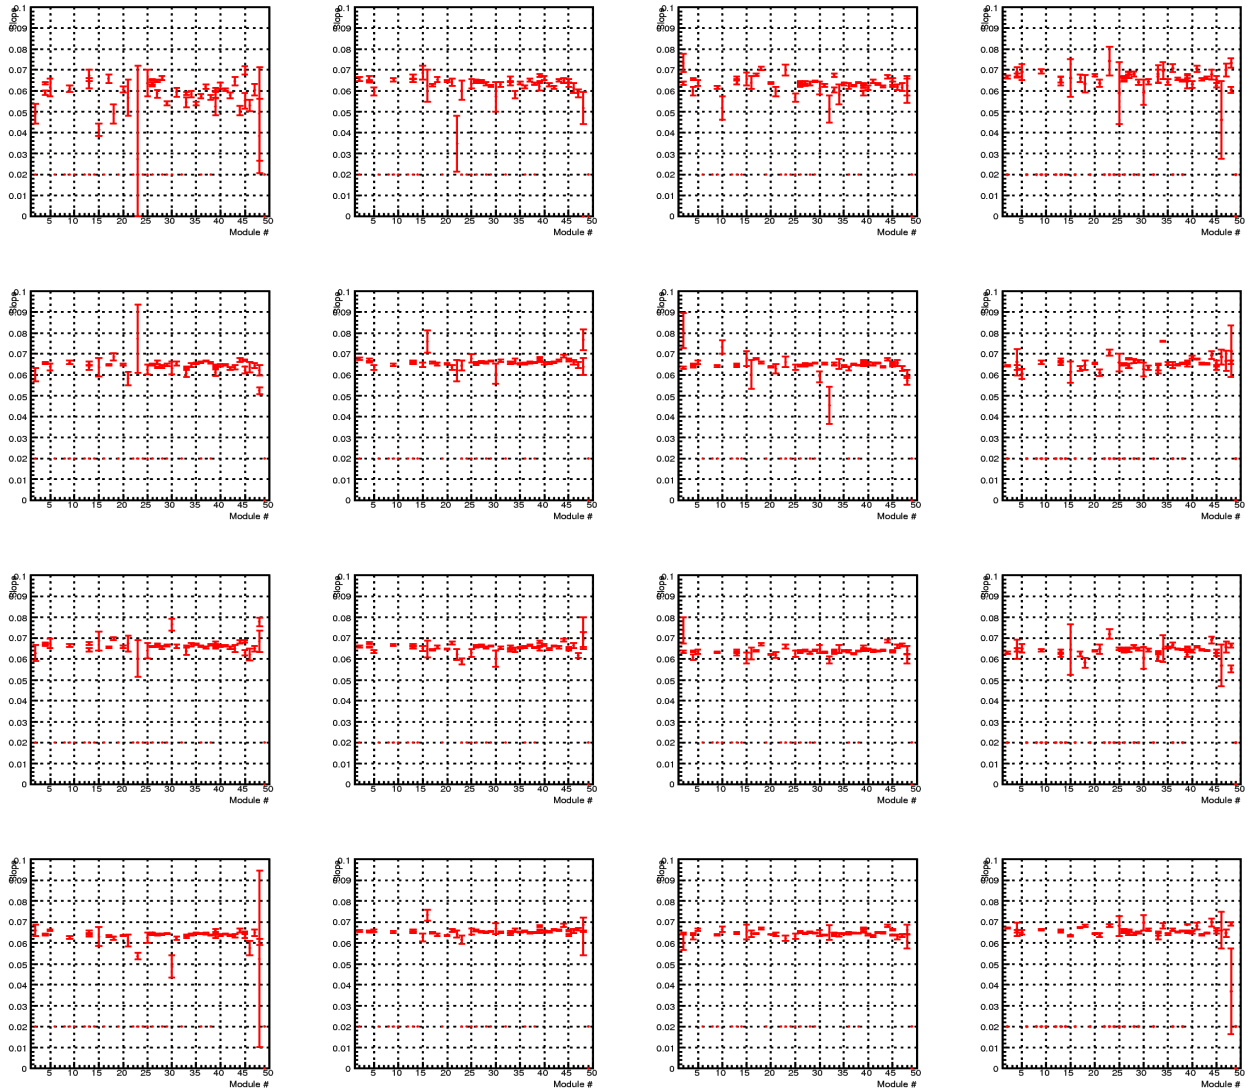

- Slope centered on 0.065
- Slope set to 0 if negative
- Slope set to 0.01 if greater than 0.15
- Slope set to 0.02 if no data is present

Slope Histogram

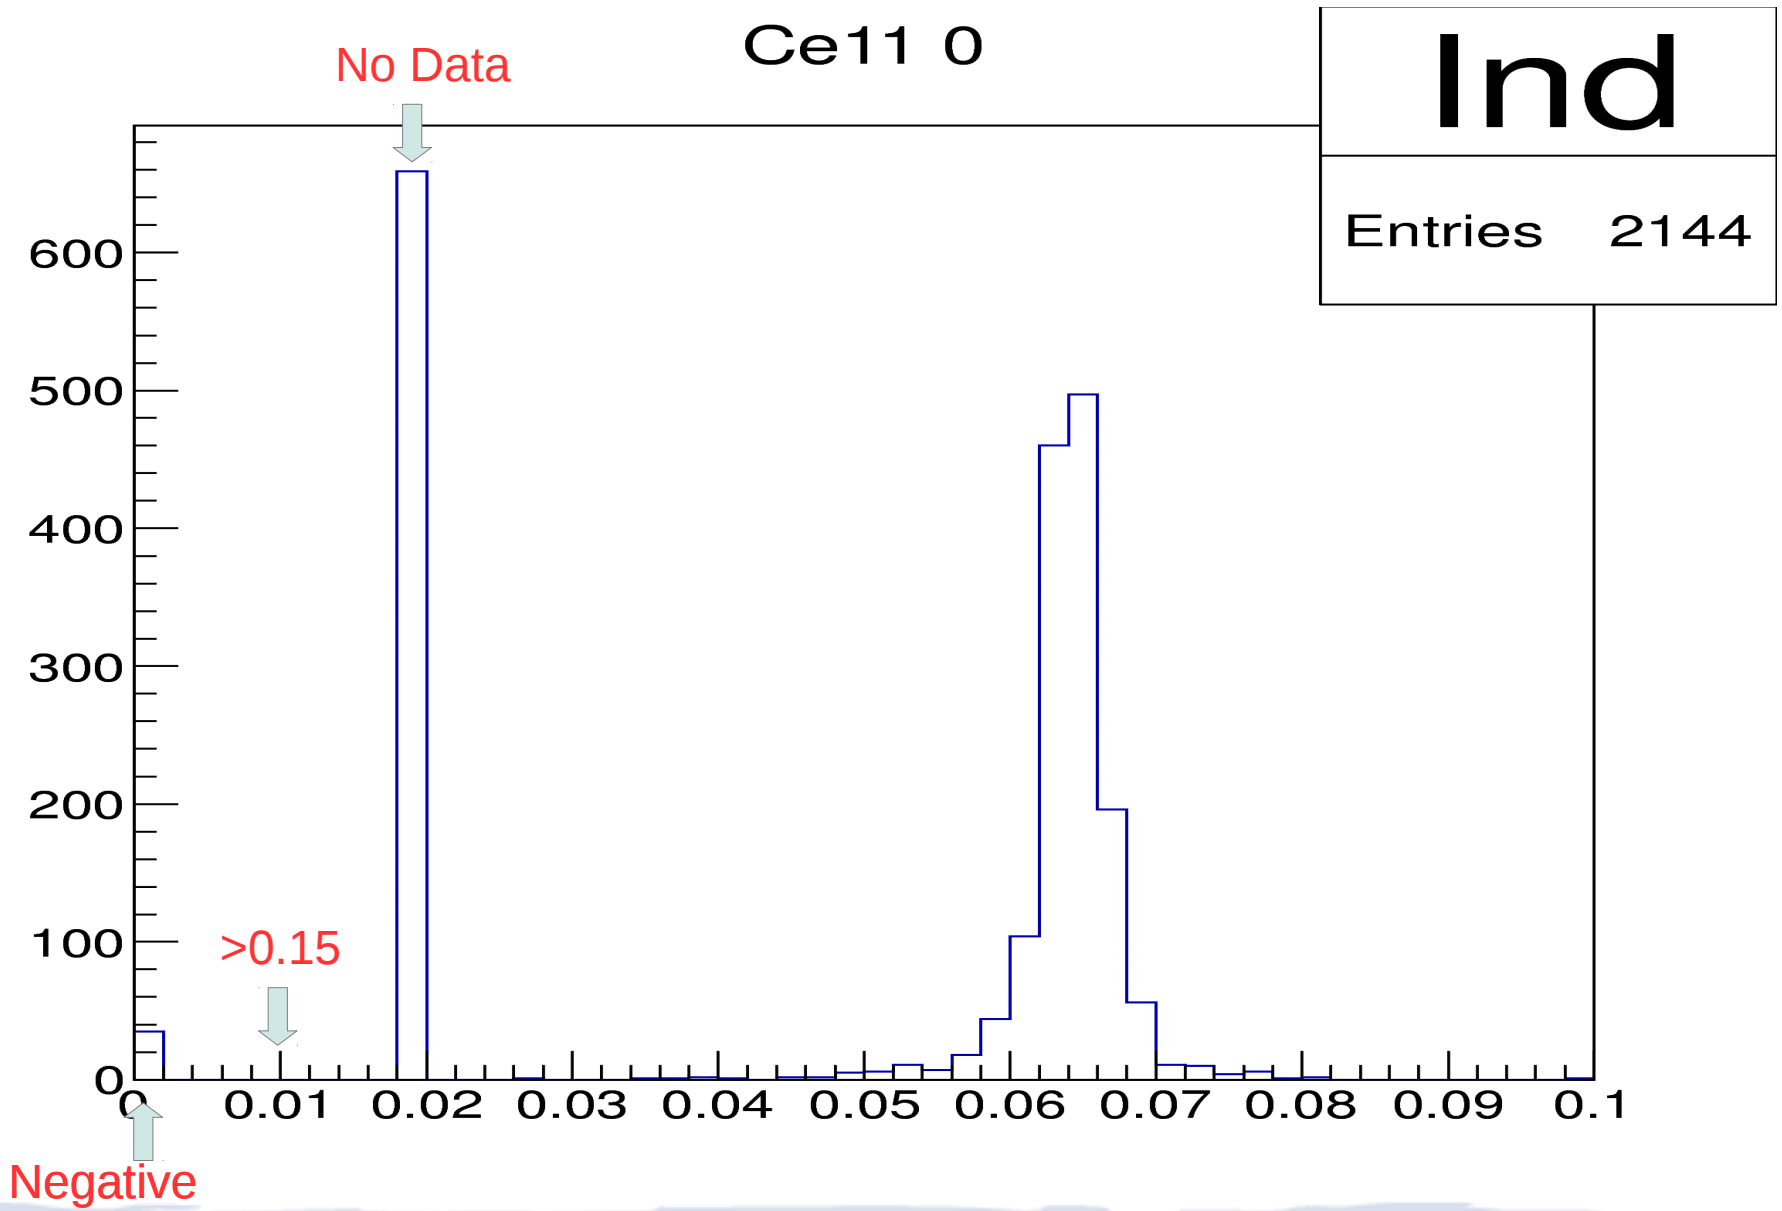

Calculations

- Using 0.5 (fiber fraction) x size x 2 MeV/cm /0.09

Row	Expected Energy (MeV)
1	17.17
2	34.34
3	51.50
4	82.00

- Using 1 MeV/Peak height and 0.065 Peak height/sum find a conversion of 0.065 MeV/sum

Energy - Upstream

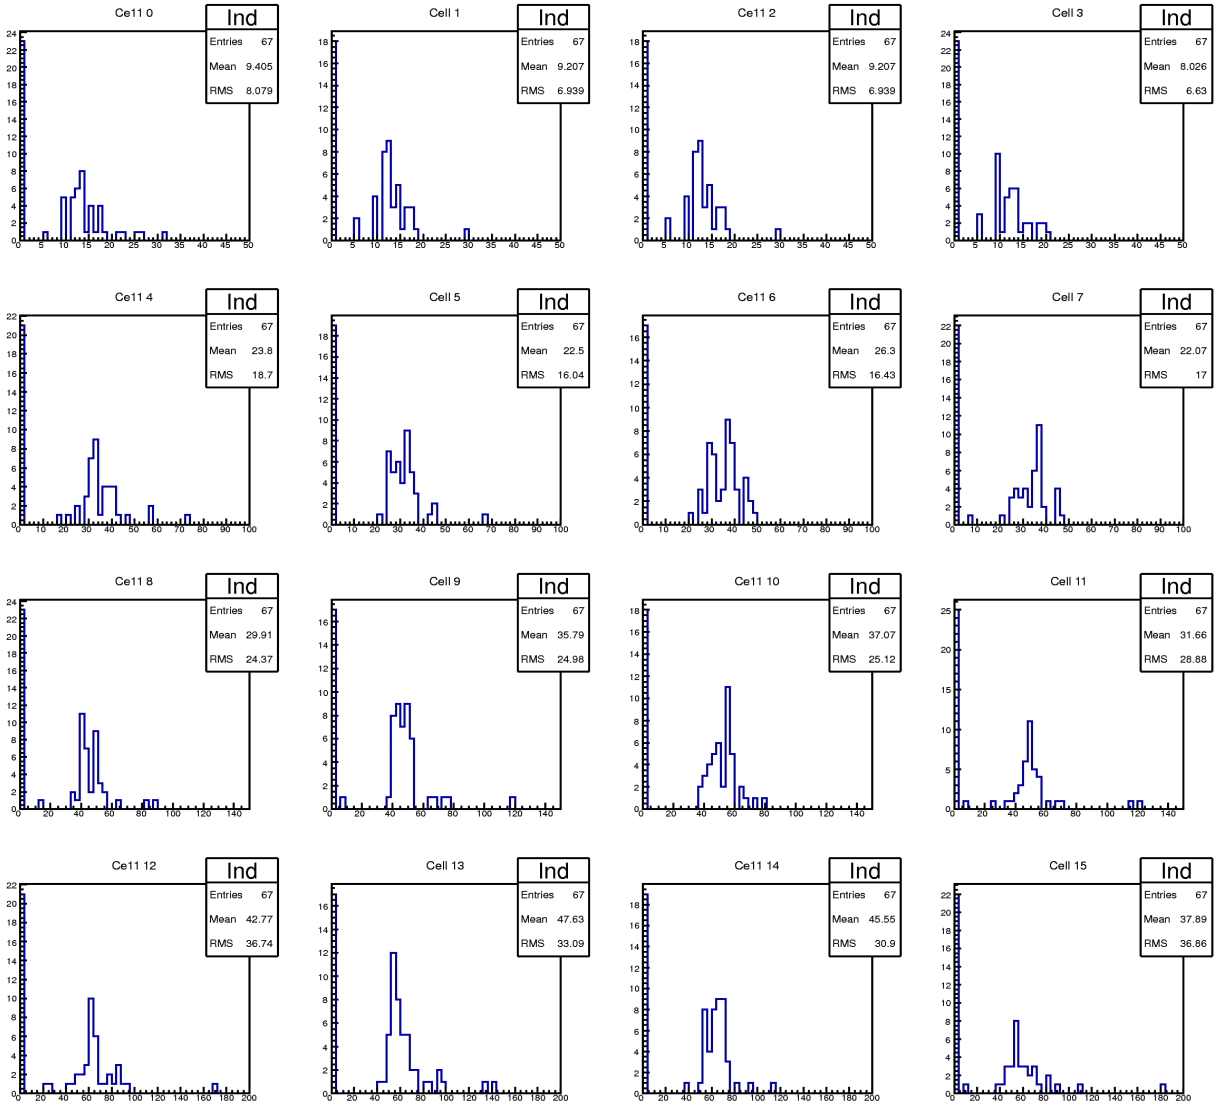

- Row 1: 9 MeV
- Row 2: 23 MeV
- Row 3: 35 MeV
- Row 4: 47 MeV

Sample Distribution – Mod 27

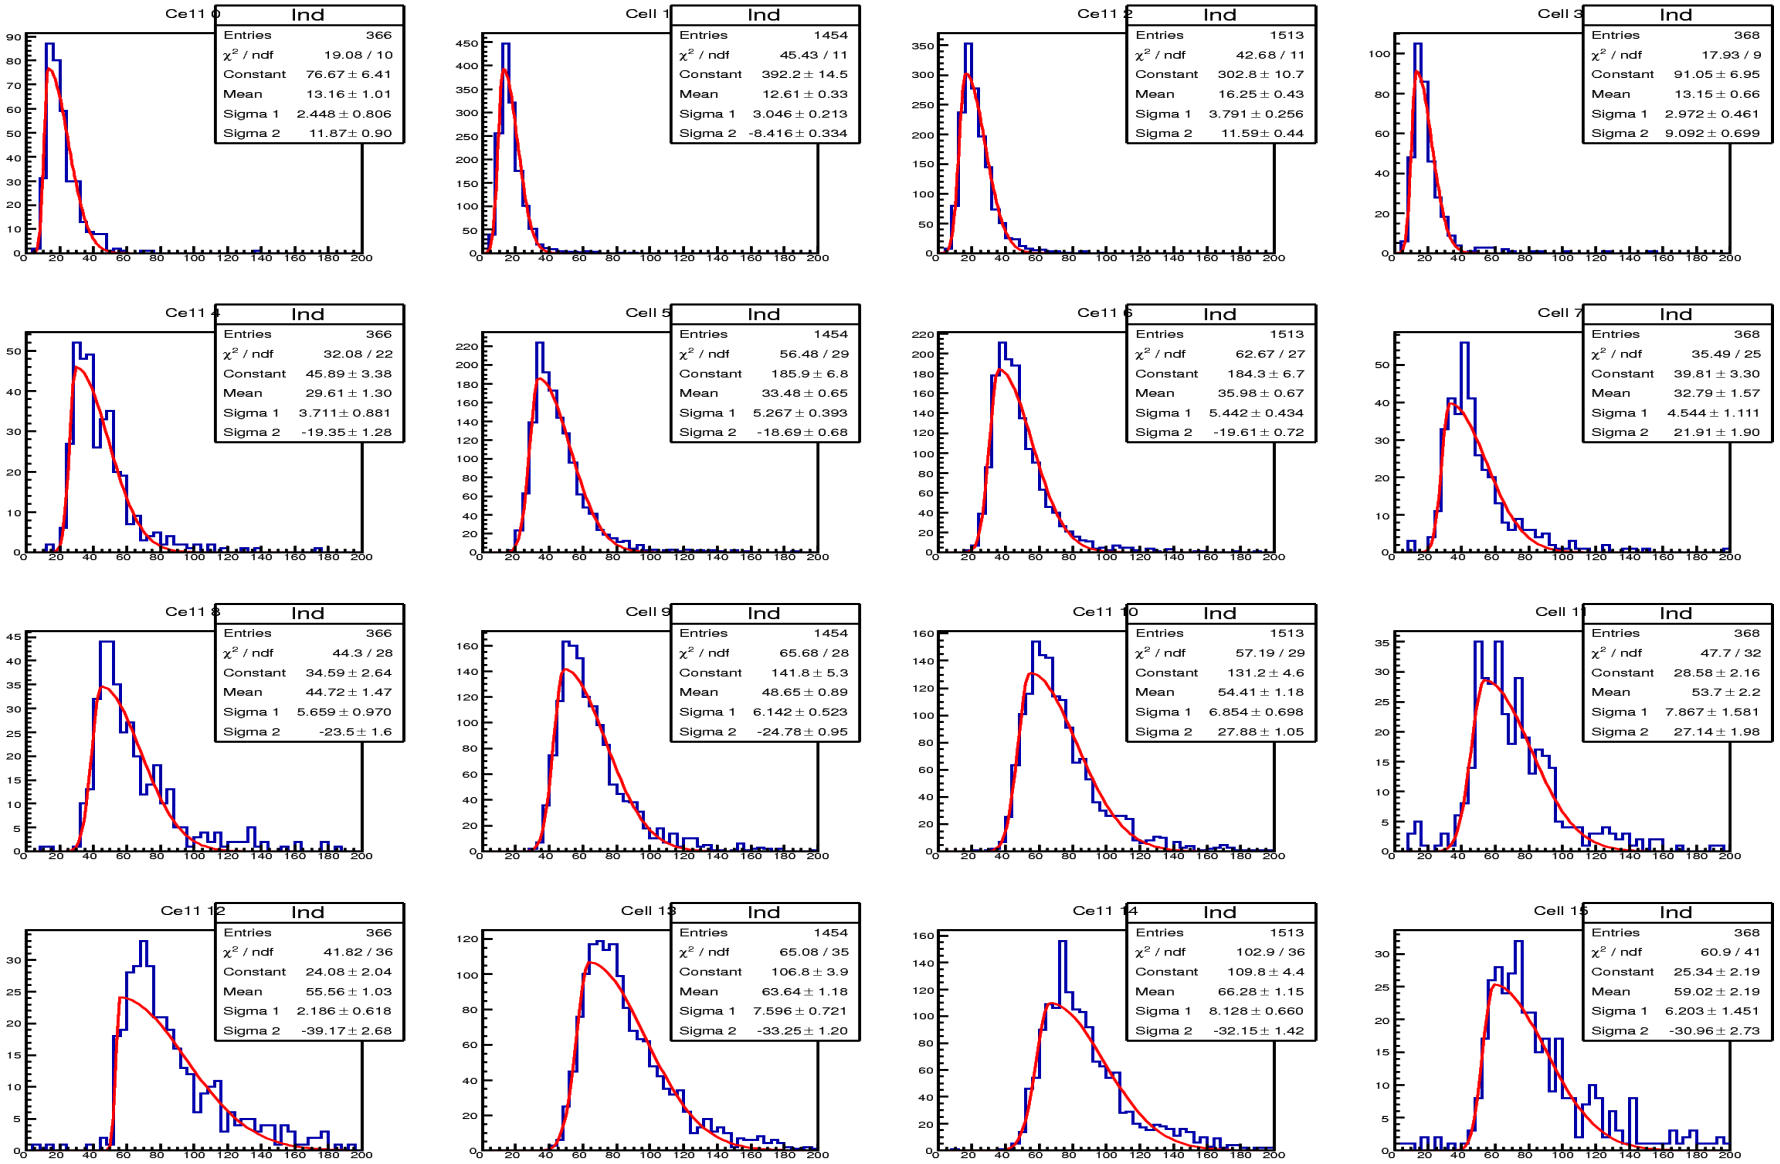

Energy – Upstream (0 removed)

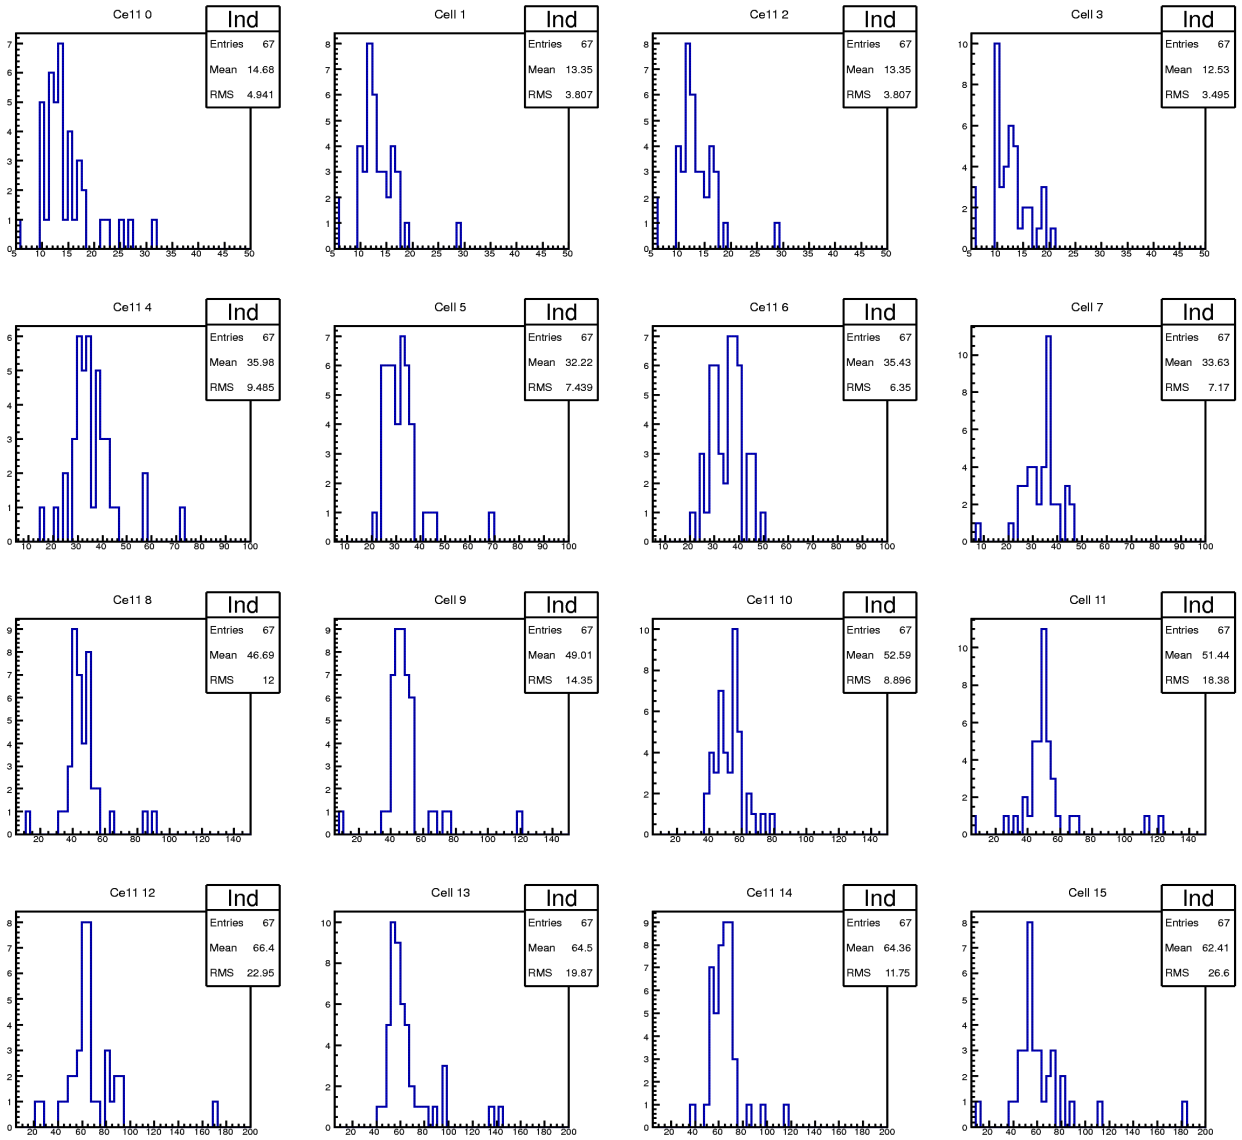

- Row 1: 14 MeV
- Row 2: 35 MeV
- Row 3: 49 MeV
- Row 4: 65 MeV

- Row 4 may be lower due to larger light guides

Energy – Cleaned Up (Upstream)

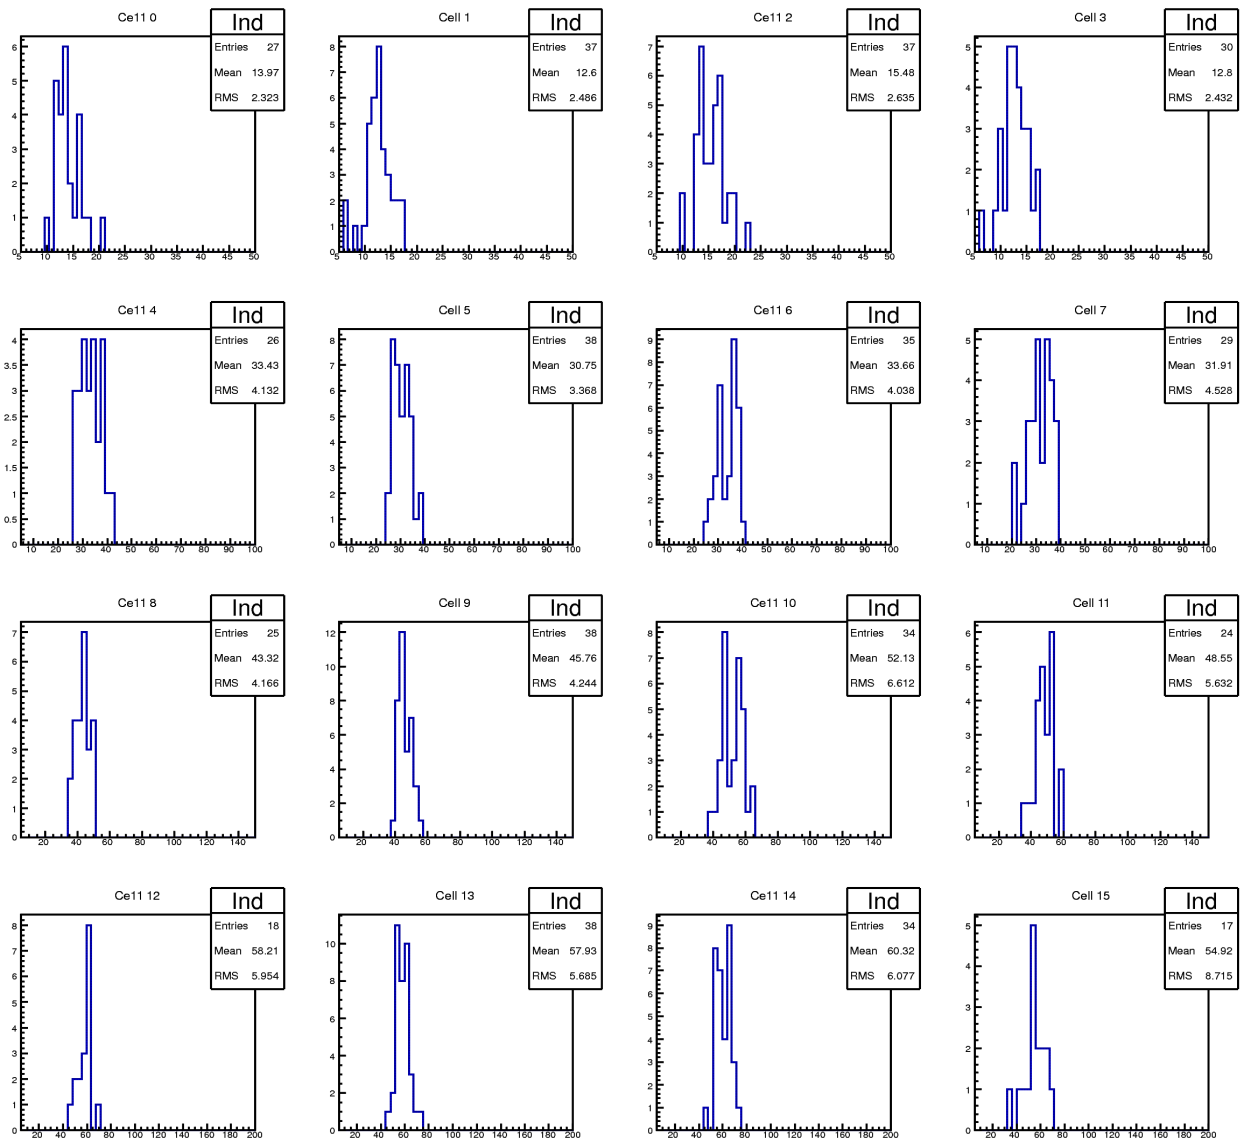

- Removed all modules with >50 good events
- Removed bad fits

Row	Expect	Actual (Col 2)
1	17.2	12.6
2	34.3	30.8
3	51.5	45.8
4	82.0	57.9

Energy Vs Mod Number - Upstream

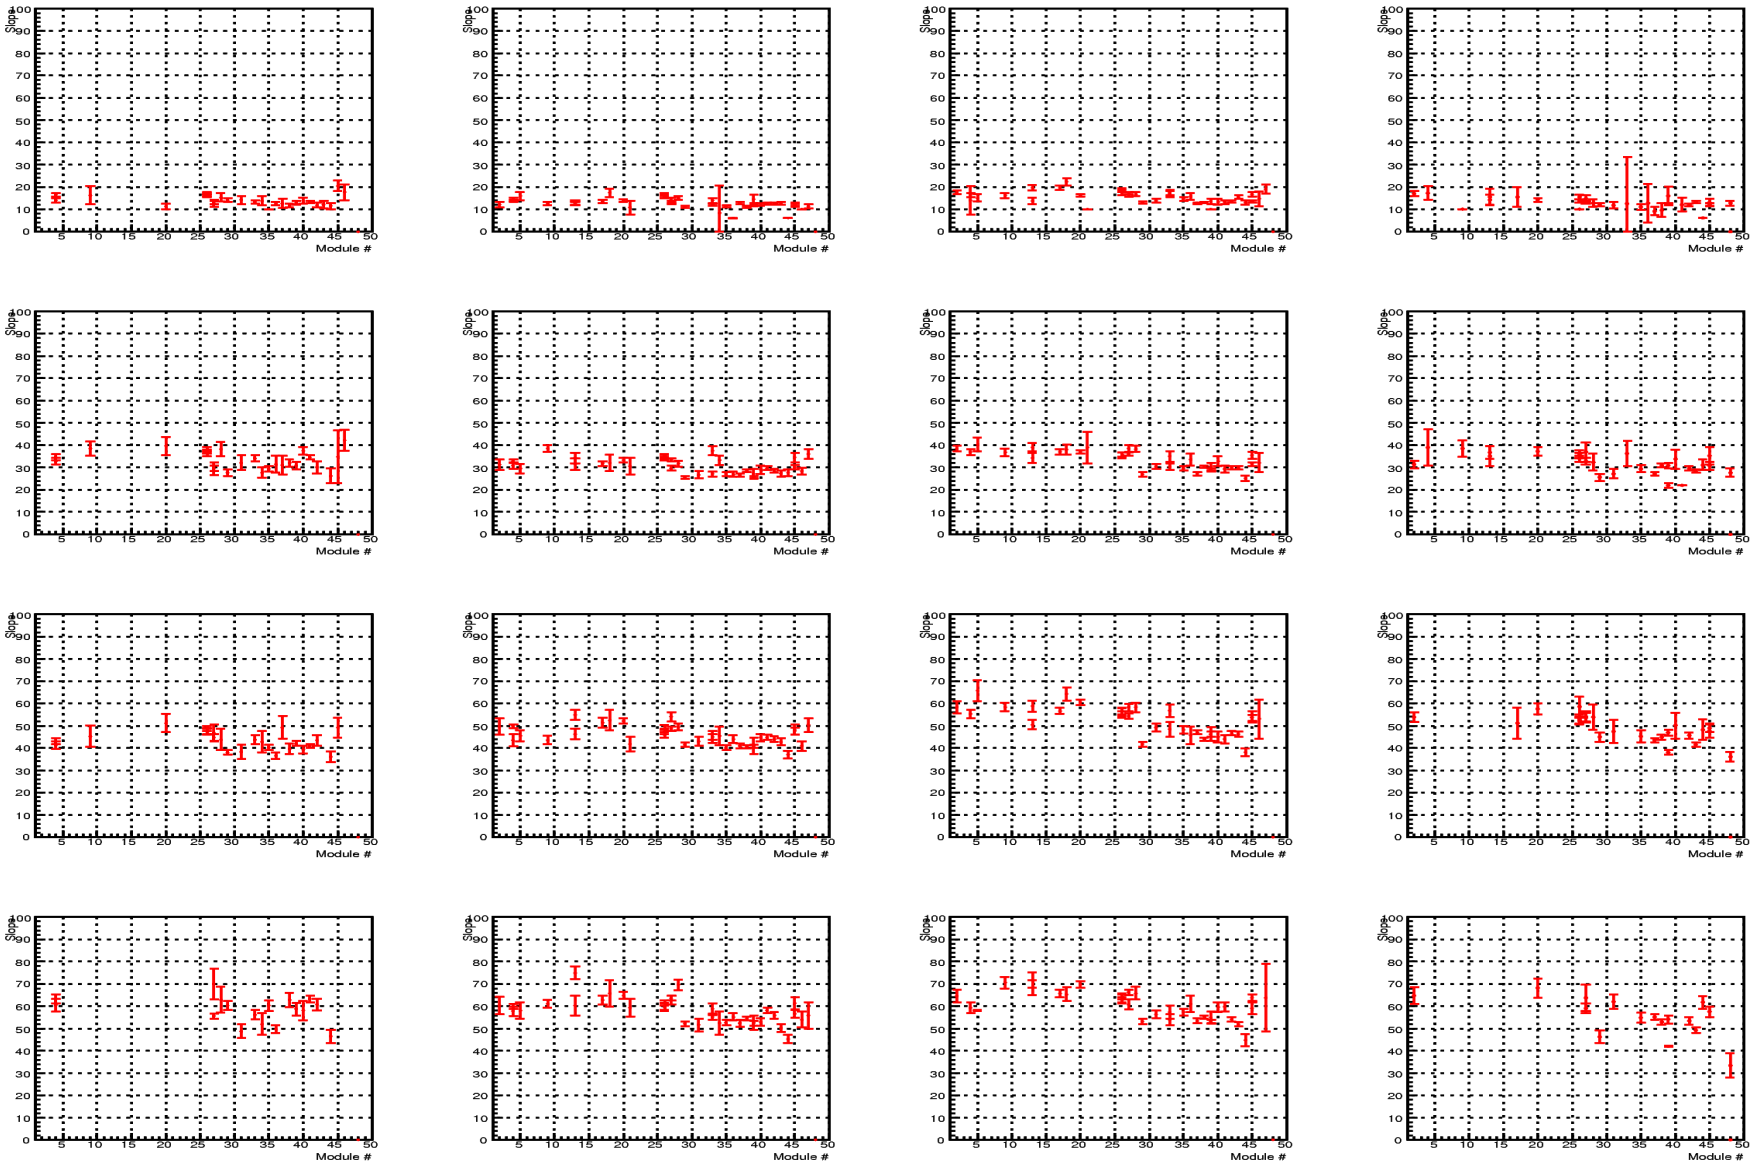

Energy Vs Mod Number - Downstream

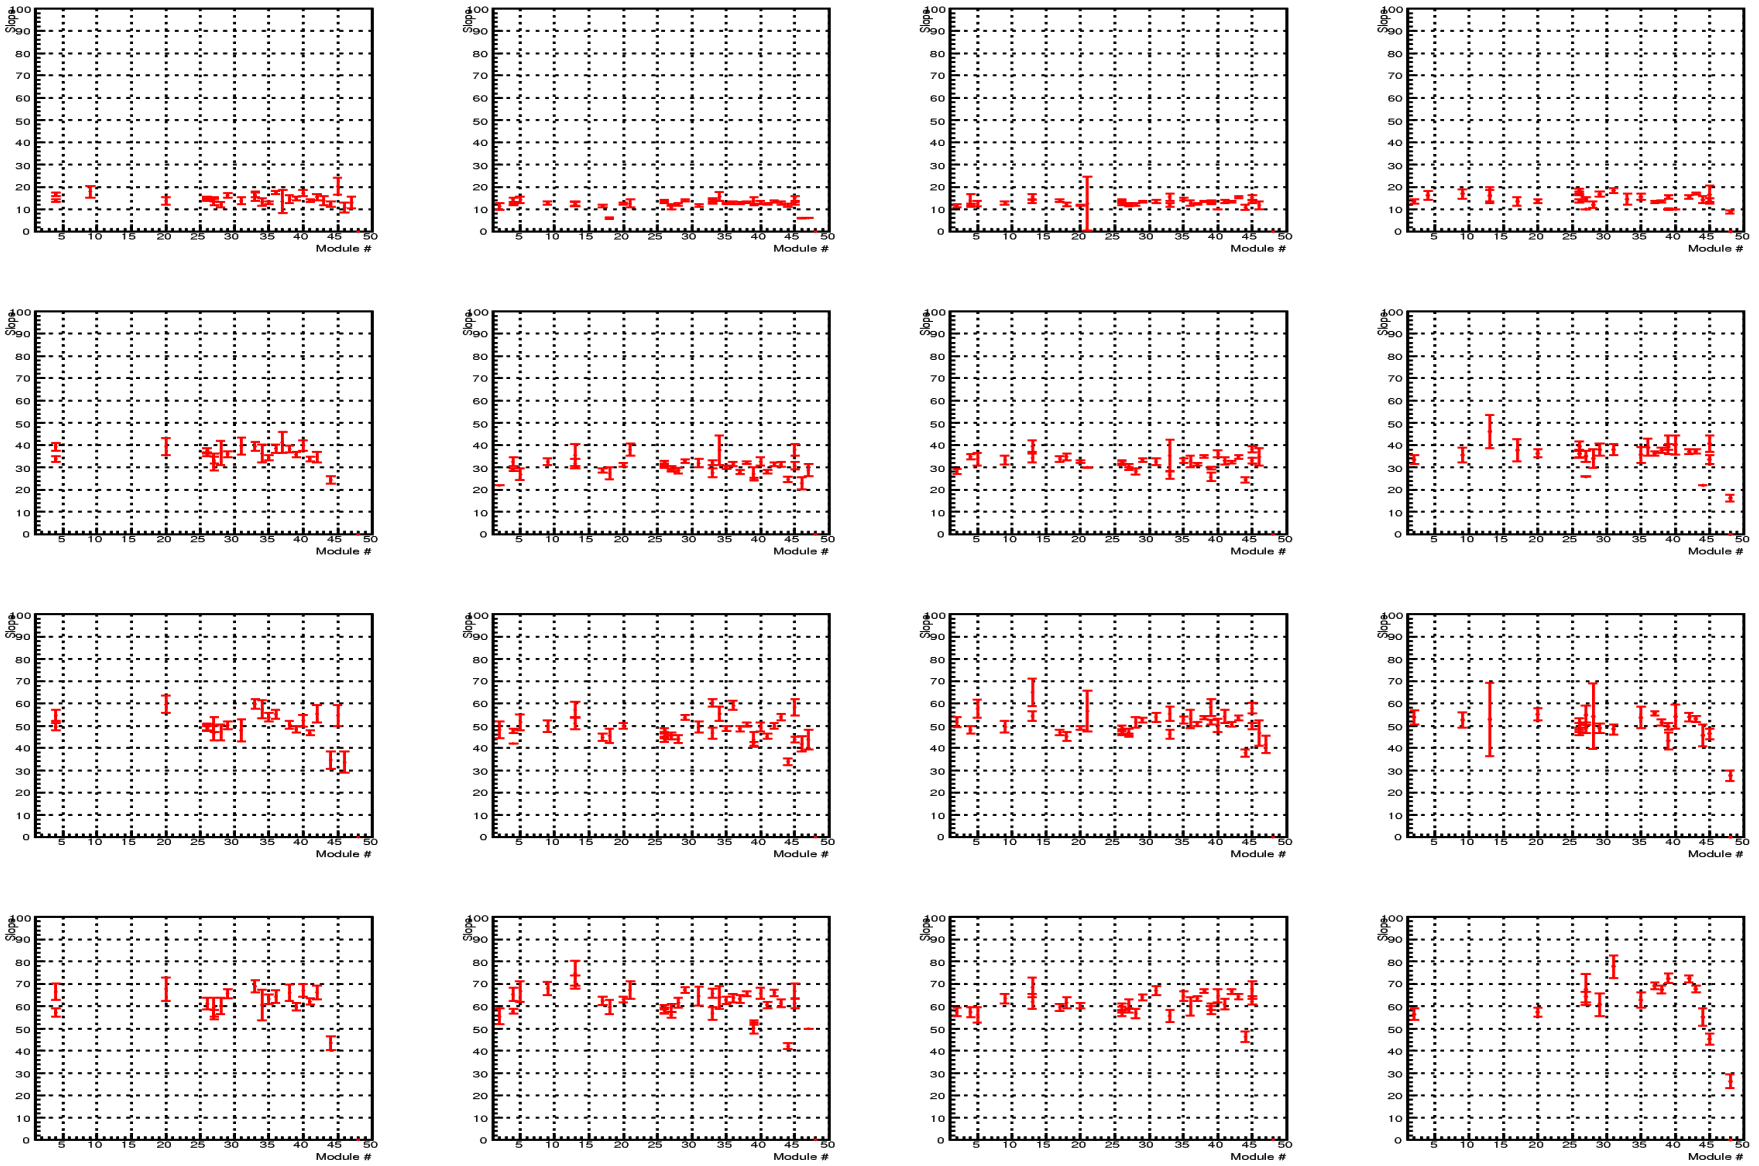

TDC Data

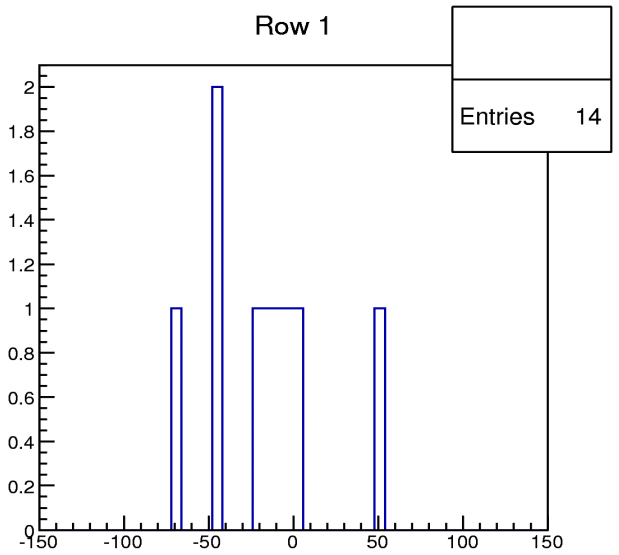

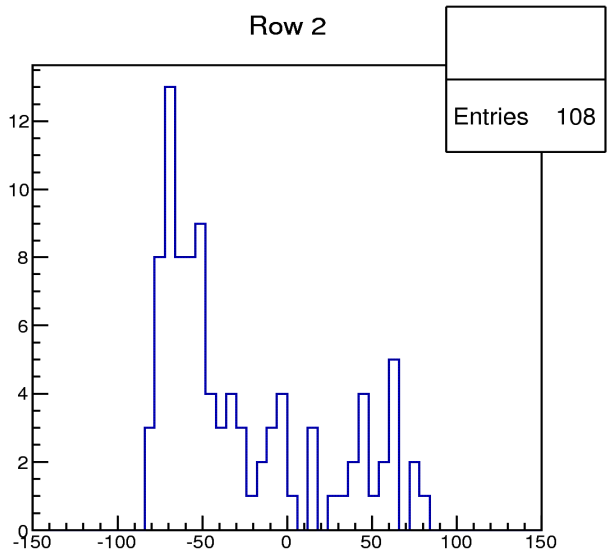

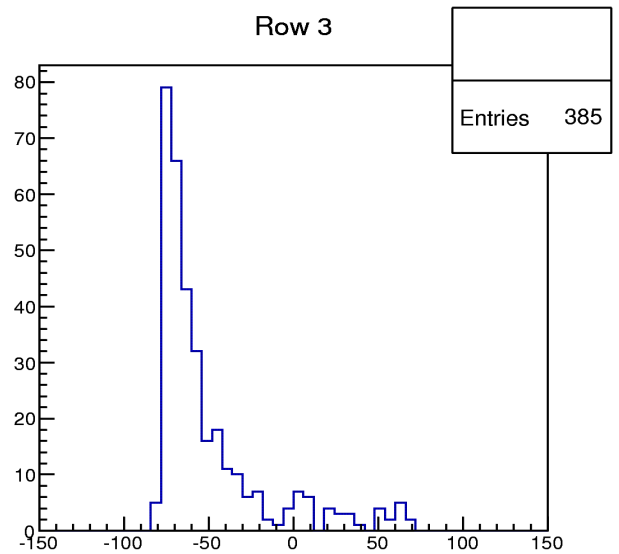

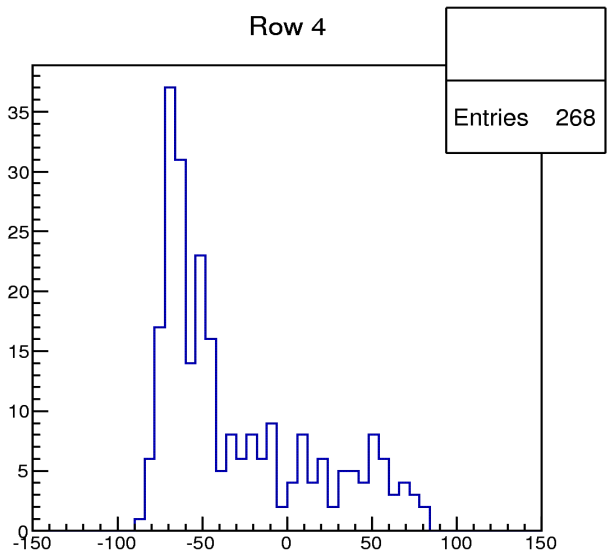

Offset

Using available TDC information for cosmic events to determine angle

Used:

(TDCup-TDCdown)/2